



## 2010 43QGP Allegro Bus

3/16/2011

**44 – FYI - OPENING THE GUEST SPOTLIGHT.** Why you say do you need to open the spotlight, because the bulb is blown, the only way to install another 50 watt Halogen sealed beam bulb is to open the housing. What does Tiffin do to make this job harder then it would usually be they paint the spotlight enclosure which hides the seams making disassembly impossible if you do not know the location of the painted over/hidden bulb housing access seam.



This Guest Remote Control Spotlight Model number 22200 uses a 50 watt Halogen bulb with a 100,000 candlepower beam, the bulb part number is 22230. This spotlight is also known by the name, Guest M-100 Spotlight. The whole secret is the knowledge of where the trim ring seam is located under that layer of paint.




To demonstrate the location of the trim ring to housing seam I inserted a thumb nail between the two pieces.





At the bottom of the housing near the trim ring is a single bump which locks the trim ring in place at the bottom of the housing. While on the top of the housing are two similar bumps. By carefully inserting a flat blade into the seam between the trim ring and the housing the ring can be separated from the housing.

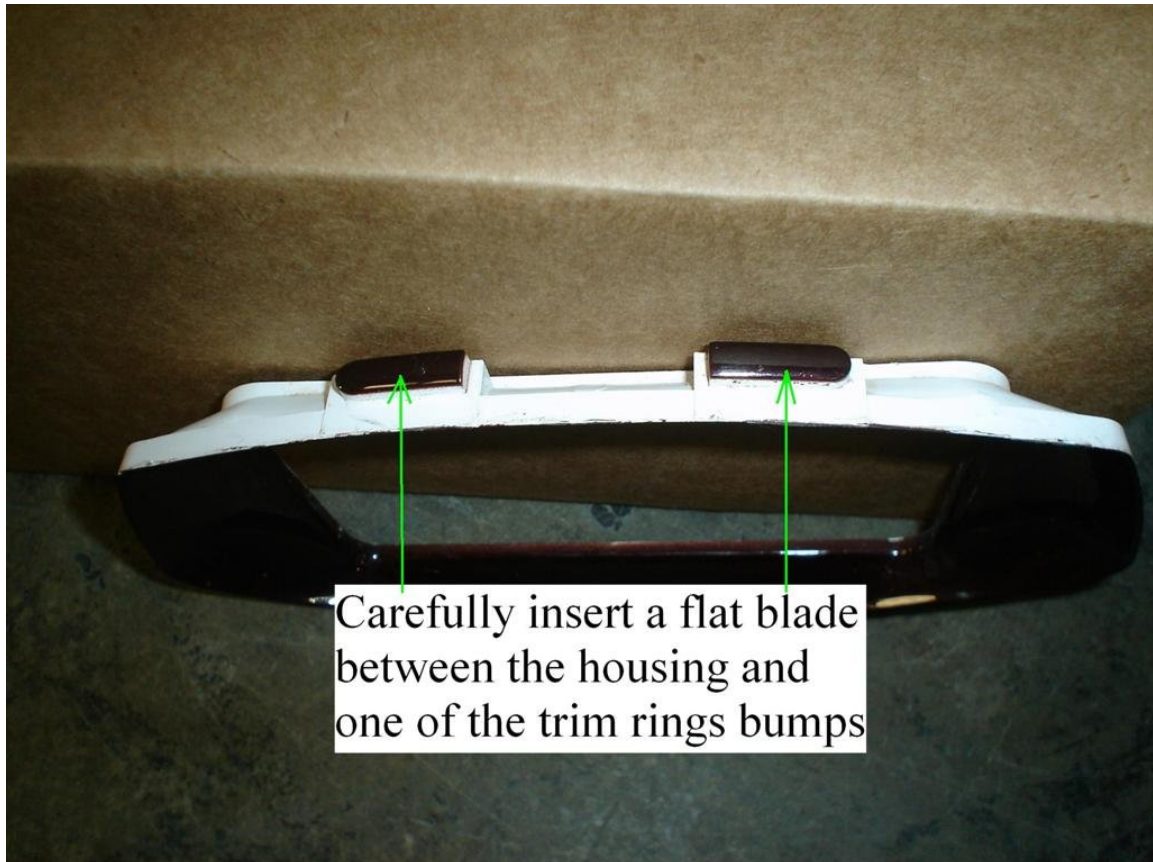

Taking this FYI to the next step can be done by someone whose spotlight bulb no longer illuminates the night.  
Good Luck.