




2010 43QGP Allegro Bus


1/25/2012

35 – FYI - OUTSIDE LIGHT LENS REMOVAL. Today while cleaning the coach I decided it was time to find out what is needed to remove the lens from the outside lights. This has been a frequent topic on the forum today was my day to learn what is necessary to remove those lenses. The over the door light and driver's side light both use the same fixture on our coach with a yellow lens. Both fixtures are lighted using a standard automotive style 1141 bulb. The top side of the lens has two tabs, by slipping a wide bladed screwdriver between the lens and the fixture (between the two top tabs) then rotating the handle compression is exerted on the top of the lens. Compress the lens just enough to pull the top of the lens out. Then it is easy to remove the lens by lifting upward as the bottom of the lens has a single tab.



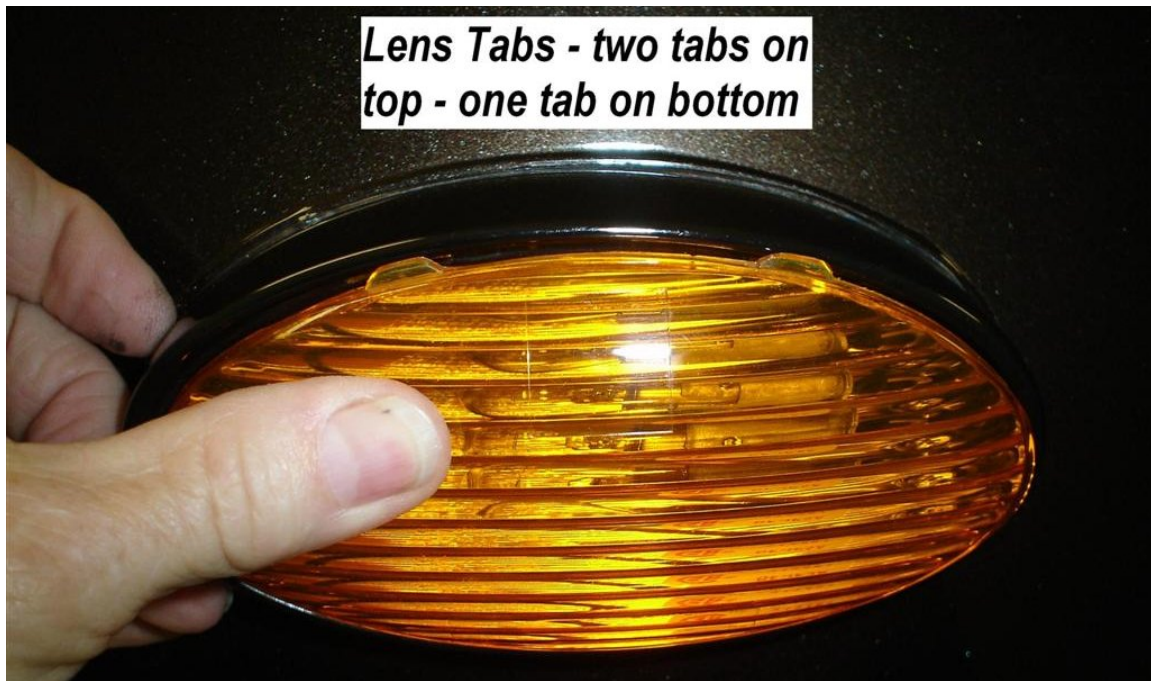

That takes care of two of the outside lights on our coach. The third light is the Patio light which uses a different fixture with a clear lens. On this fixture there are again three tabs on the lens, however the two tabs are located at the bottom and a single tab is located on the top. This fixture also uses a standard automotive type bulb except this bulb is an 1156 light bulb.

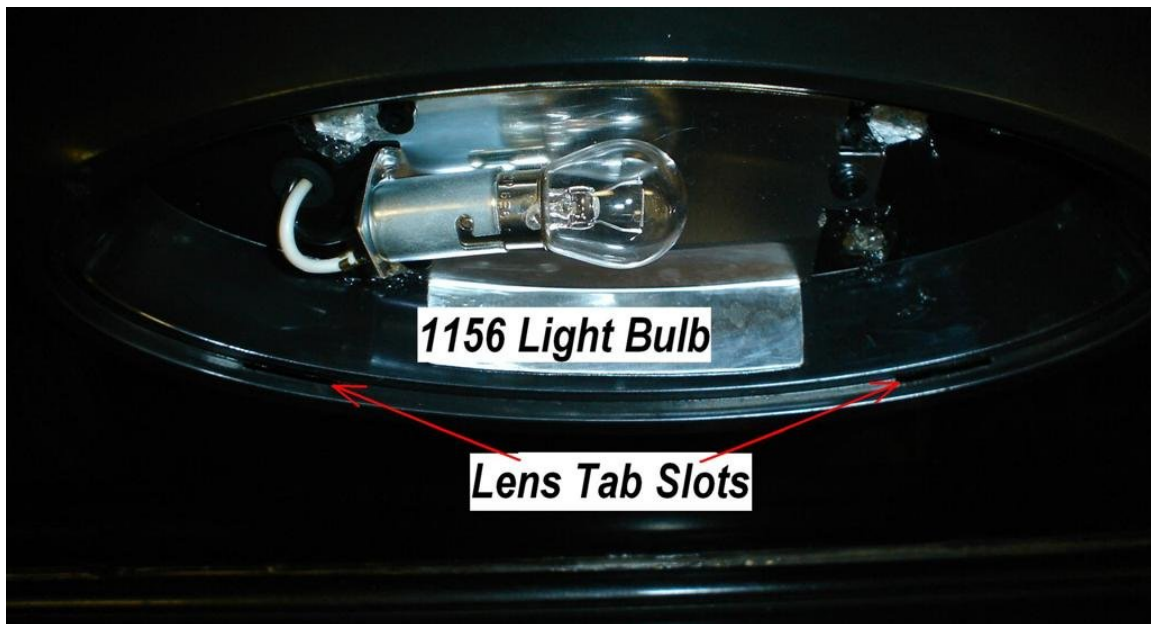

Reinstalling the lens is not hard to do just insert the bottom tab(s) then apply gentle pressure on the top of the lens until the lens snaps into place.